


Auto Activating Technology. Don't Need to Drop the Ball!



SlidePRO Friction Breaking Technology

SlidePRO Friction Breaking System Strengths

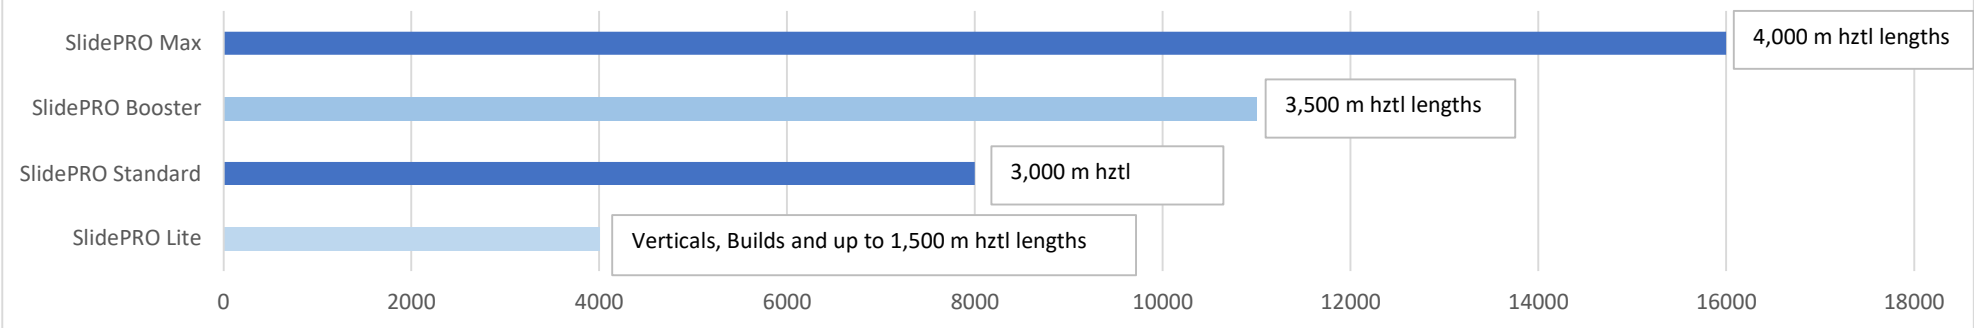

Friction Breaking Setup	Length	Pressure Drop	Placement from Bit	Friction Breaking Strength	Auto Activation
SlidePRO Lite	7.0 m	3,800 kPa	300 - 500 m	4,000 daN (9,000 lbs)	No
SlidePRO Standard	10.5 m	3,800 kPa	700 - 1000 m	8,000 daN (18,000 lbs)	Yes
SlidePRO Booster	11.0 m	3,800 kPa	1000 - 1400 m	11,000 daN (24,000 lbs)	Yes
SlidePRO Max	14.0 m	3,800 kPa	1400 - 1900 m	16,000 daN (35,000 lbs)	Yes

Notes

Connections DS40
 Auto Activation feature is available upon request. No ball or dart is required.
 Deactivated SlidePro operates as a Lite tool in vertical until fully activated at KOP

Contacts:

Jason Bjornson 403 512 0572 Mission Drilling
 Stan LeClerq 403 700 0020 Sabre Downhole

